





EVERLAST - IVR 944 AS




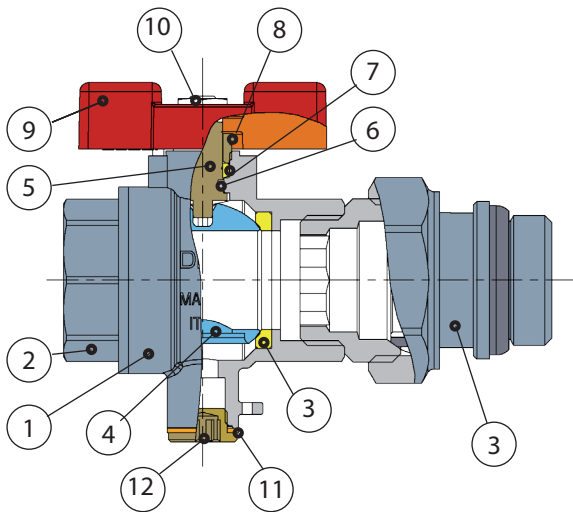
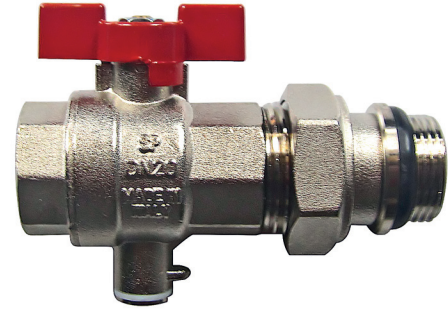
 Valvola a sfera a passaggio totale con portasonda e bocchettone autotenuta
Impieghi: impiantistica di riscaldamento

 Full bore ball valve with sensor connection with auto seal tailpiece
Application: heating installations

 Kugelhahn mit vollem Durchgang mit Anschluss für Temperatursonde und selbstdichtendem Stutzen
Anwendung: Heizungssysteme

 Vanne à spère a passage total avec fixation sonde pour température et raccord autoétanche
Application: systèmes de chauffage

 Полнопроходной шаровой кран с соединением для датчика температуры со сгоном и самогерметизирующейся прокладкой
Сфера применения: для систем отопления




*il tappo 12 è utilizzato solo come protezione del filetto.
 Il raccordo sonda deve essere compatibile con pressioni e temperature utilizzate


*plug 12 is only for thread protection.
 The probe connection fitting must be suitable for the installation's working pressure and temperature

N	DENOMINAZIONE PART NAME	MATERIALE MATERIAL	TRATTAMENTO TREATMENT
1	Corpo - Body	Ottone - Brass CW 617N - UNI EN 12165/98	Nichelato - Nickel plated
2	Manicotto Body end	Ottone - Brass CW 617N - UNI EN 12165/98	Nichelato - Nickel plated
3	Seggio - Seat	PTFE	
4	Sfera - Ball	Ottone - Brass CW 617N - UNI EN 12165/98	Cromata - Chrome plated
5	Asta - Stem	Ottone - Brass CW 614N - UNI EN 12164/98	
6	O-Ring - O-Ring	NBR	
7	Rondella - Seal	PTFE	
8	Premistoppa Packing nut	Ottone - Brass CW 614N - UNI EN 12164/98	
9	Maniglia - Handle	Alluminio - Aluminium	Verniciato - Painted
10	Dado - Nut	Acciaio - Steel	Zincato - Zinc plated
11	Guarnizione - Seal	PTFE	
12*	Tappo - Plug	Ottone - Brass CW 614N - UNI EN 12164/98	Nichelato - Nickel plated
13	Bocchettone Tail piece	Ottone - Brass CW 617N - UNI EN 12165/98	Nichelato - Nickel plated

PRESSIONE / TEMPERATURA - PRESSURE / TEMPERATURE

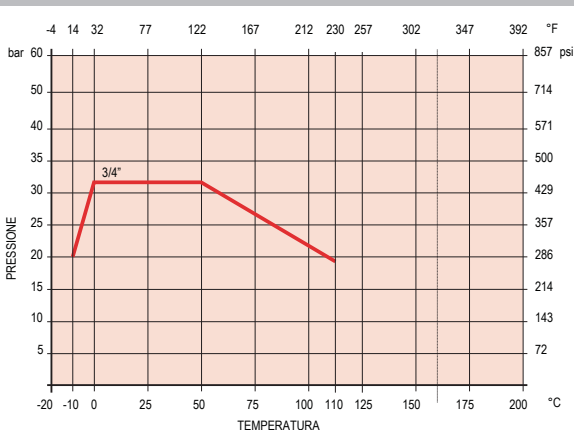

Size
3/4" 32 bar




Max
+110° C
Min
-10° C



ISO 228-1

Asta anticoppio
Anti blow-out stem

PERDITE DI CARICO - FLOW AND PRESSURE DROPS

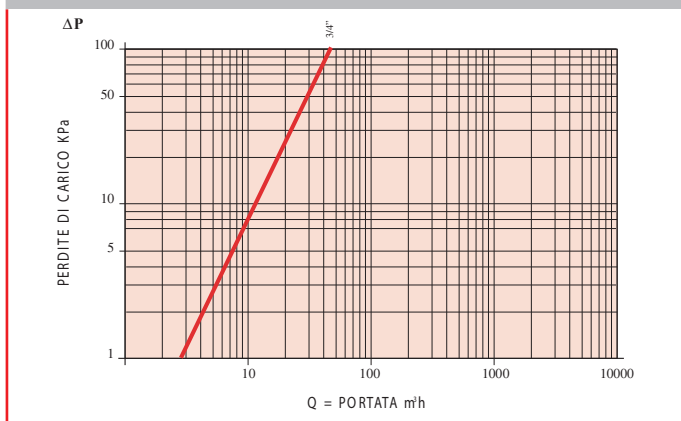

Misura - Size	KV
3/4"- 20	45

DIMENSIONI - DIMENSIONS (mm)

Size	F	F1	Ø	S	H	H1	F2	Ø1	L	A	B
3/4" X 3/4"	G 3/4"	G 3/4"	20	99	40	32	M10x1	6.2	50	28	71
3/4" X 1"	G 3/4"	G 1"	20	99	40	30	M10x1	6.2	50	28	71

