

# MERCURY VALVOLE MANUALI PER RADIATORI - IVR 538-538/2-540-540/2



Valvole radiatori manuali diritte e a squadra, attacco PE-X, multistrato e tubo rame - bocchettone con autotenuta (IVR 538-540) e senza autotenuta (IVR 538/2 - 540/2).

Angle and straight manual radiator valves, PE-X, multi-layer copper pipe connection - tail piece with auto-seal (IVR 538-540) or without auto-seal (IVR 538/2 - 540/2)

Robinets de radiateur manuels droit et équerre, raccord à compression pour PEX/multicouches/tube cuivre - raccord union avec auto-étanche (IVR 538-540) ou sans auto-étanche (IVR 538/2 - 540/2).

Gerade und winkelköpfige manuelle Heizkörperventilen, geschnittene Heizkörperventilen, Verdichtungsanschluss für Kupferrohr/Multiplexplatte - Anschlussstutzen mit Autodichte (IVR 538-540) und ohne Autodichte (IVR 538/2 - 540/2).

Válvulas radiador manual recta y escuadra, a compresión para PE-X/tubo de cobre/multicapa terminal de conexión tapón - radiador con junta tórica (IVR 538-540) y sin junta tórica (IVR 538/2 - 540/2).

Válvula rectas e em esquadria manuais para radiador, conexão para tubo de cobre/PEX/multicamada - fecho automático (IVR 538-540) ou sem fecho automático (IVR 538/2 - 540/2).

IMPIEGHI: Le valvole IVR sono adatte per l'utilizzo su ogni tipo di radiatore

APPLICATION: IVR valves are suitable for use with any model of radiator

EMPLOI: Les robinets IVR sont conseillés pour l'utilisation sur chaque type de radiateur

ANWENDUNGEN: Die IVR Ventilen passen sich für den Einsatz auf jedem Heizkörper typ an


EMPLEO: Las válvulas IVR son idóneas para su utilización sobre todo tipo de radiadores

APLICAÇÃO: As válvulas IVR 538-540 podem ser usadas com qualquer modelo de radiador.




N. N.	DENOMINAZIONE PART NAME	MATERIALE MATERIAL	TRATTAMENTO TREATMENT
1	Corpo - Body	Ottone - Brass CW 617N - UNI EN 12165/98	Nichelato - Nickel plated
2	Asta - stem	Ottone - Brass CW 614N - UNI EN 12164/98	
3	Volantino - Handle	ABS	Ral 9010
4	O-ring - O-ring	EPDM	
5	Bocchettone - Tail piece	Ottone - Brass CW 617N - UNI EN 12165/98	Nichelato - Nickel plated
6	Ranella - Washer	Ottone - Brass CW 614N - UNI EN 12164/98	Nichelato - Nickel plated
7	Guarnizione - Gasket rubber	EPDM	
8	Guarnizione - Gasket	PTFE	
9	Calotta - Nut	Ottone - Brass CW 614N - UNI EN 12164/98	Nichelato - Nickel plated

DATI TECNICI - TECHNICAL DATA	
Pressione massima di esercizio Max. working pressure	10 bar
Temperatura massima di esercizio Max. working temperature	100°C

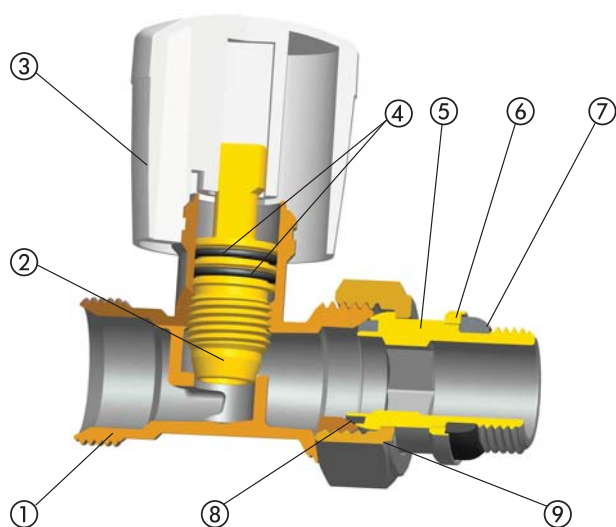


IVR 538

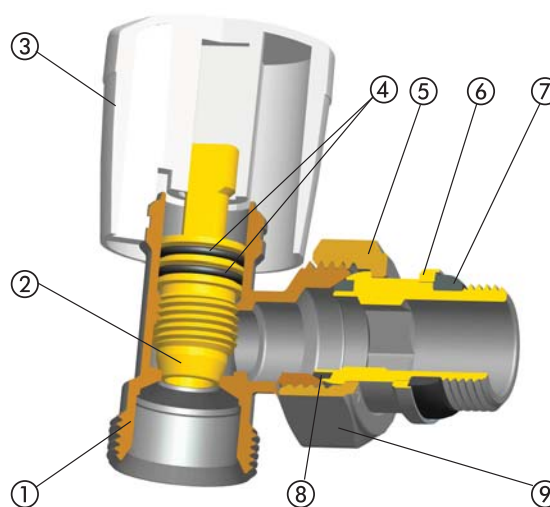


IVR 540

# MERCURY VALVOLE MANUALI PER RADIATORI - IVR 538-538/2-540-540/2

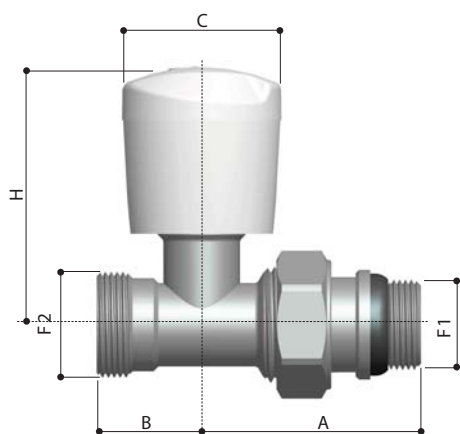

IVR 538

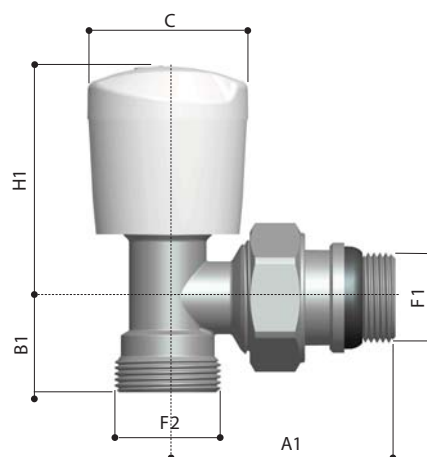


IVR 540

DN	3/8"X16	3/8"X18	1/2"X16	1/2"X18
A	45	45	49,5	49,5
B	22	23,5	22	24
H	59	59	59	59
A1	47	47	51	51
B1	20	20	21,5	21,5
H 1	52	52	52	52
C	37	37	37	37
F1	3/8"	3/8"	1/2"	1/2"
F2	1/2"	24-19	1/2"	24-19


Dimensioni in mm -Dimensions in mm

DIAGR. PERDITE DI CARICO - FLOW AND PRESSURE DROP

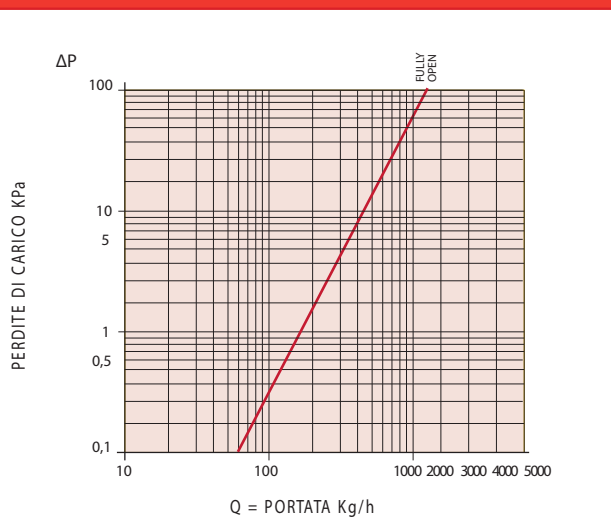

IVR 538 1/2" - 3/8"

DIAGR. PERDITE DI CARICO - FLOW AND PRESSURE DROP

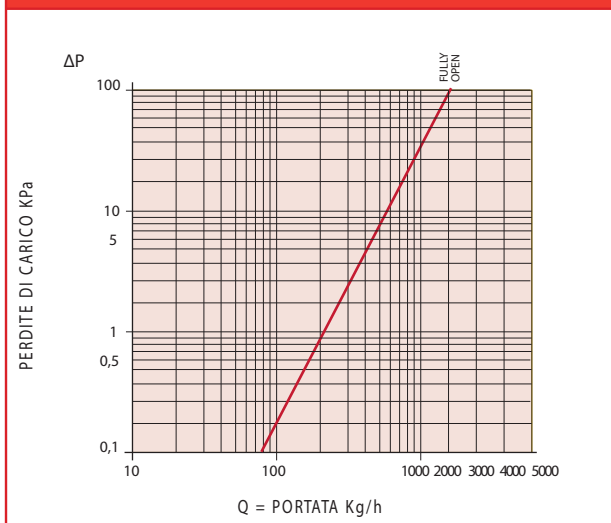

IVR 540 1/2" - 3/8"