

SARACINESCA PER POMPA - IVR 650




Saracinesca in ottone per pompa. Attacchi tubo rame a compressione.


Pump brass gate valve with compression ends for copper pipe.

Vanne à opercule en laiton pour pompe avec raccords à compression pour tube cuivre.

Messingschieber für Pumpe. Kupferrohranschlüsse mit Verdichtung.

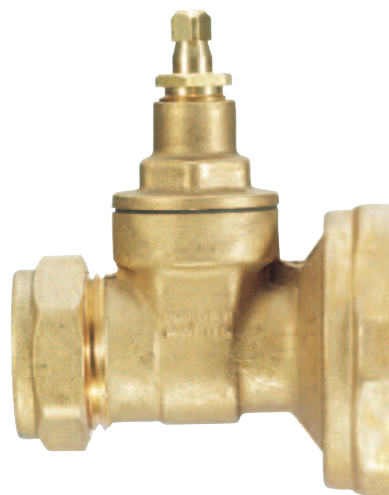

N. N.	DENOMINAZIONE PART NAME	MATERIALE MATERIAL	TRATTAMENTO TREATMENT
1	Corpo - Body	Ottone - Brass CW 617N - UNI EN 12165/98	
2	Guarnizione - Gasket	Fibra termoresistente Heat resisting fibre	
3	Vitone - Bonnet	Ottone - Brass CW 617N - UNI EN 12165/98	
4	Cuneo - Wedge	Ottone - Brass CW 617N - UNI EN 12165/98	
5	Asta - Stem	Ottone - Brass CW 614N - UNI EN 12164/98	
6	Ghiera - Screwed ring	Ottone - Brass CW 614N - UNI EN 12164/98	
7	Guarniz. asta - Packing	PTFE	
8	Premistoppa - Packing nut	Ottone - Brass CW 614N - UNI EN 12164/98	
9	Ogiva - Olive	Ottone - Brass CW 602N - UNI EN 12165/98	
10	Calotta - Nut	Ottone - Brass CW 617N - UNI EN 12165/98	
11	Guarnizione - Packing	Fibra termoresistente Heat resisting fibre	
12	Calotta - Nut	Ottone - Brass CW 617N - UNI EN 12165/98	

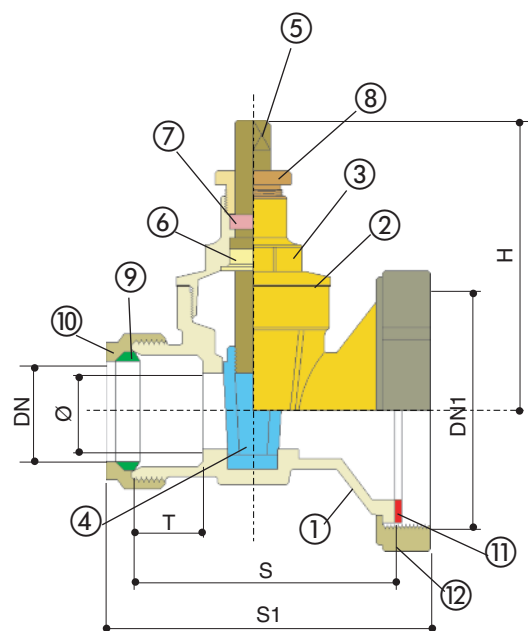

DN	22	28
Ø	15	19
S	52	56
S1	67	73
T	14	14
H	60	71
DN1	1"1/2	1"1/2

Dimensioni in mm - Dimensions in mm

DATI TECNICI - TECHNICAL DATA

Pressione di esercizio Working pressure	10 bar
Temperatura di esercizio Working temperature	0°C + 90°C