


- Valvola di ritegno in acciaio inox AISI 316  
Attacchi F/F
- AISI 316 stainless steel vertical check valve  
Threaded ends F/F
- Rückschlagventil aus Edelstahl AISI 316  
IG/IG
- Clapet anti-retour à ressort en acier inox AISI 316  
Fixations F/F
- Вертикальный обратный клапан из нержавеющей  
стали AISI 316 - Соединения В/В

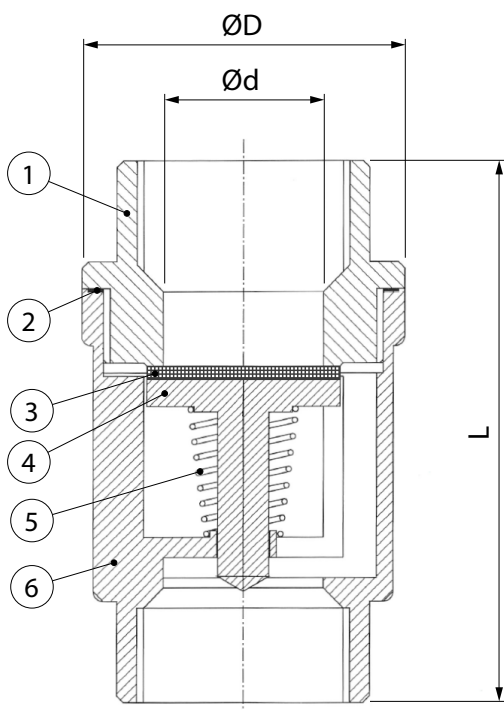

ITEM	PART NAME	MATERIAL	QTY
1	Manicotto - Body End	CF8M	1
2	Guarnizione Corpo - Body Gasket	PTFE	1
3	Guarnizione Otturatore - Disc Gasket	VITON	1
4	Otturatore - Disc	CF8M	1
5	Corpo - Body	CF8M	1
6	Molla - Spring	SS316	1


DN	Max Pressure
1/4" - 1"	84 bar
1 1/4" - 1 1/2"	70 bar
2" - 4"	63 bar

Temperature Range
Max +180° C
Min -25° C



DN	Ød	ØD	L	Kv
1/4"	8	30.5	53	2.1 m <sup>3</sup> /h
3/8"	10	30.5	53	2.8 m <sup>3</sup> /h
1/2"	15	37	56	4.4 m <sup>3</sup> /h
3/4"	20	42	63	6.8 m <sup>3</sup> /h
1"	25	48	74	10 m <sup>3</sup> /h
1 1/4"	30	58	81	17 m <sup>3</sup> /h
1 1/2"	38	70	91	26 m <sup>3</sup> /h
2"	47	82	97	43 m <sup>3</sup> /h
2 1/2"	61	102.5	118	75 m <sup>3</sup> /h
3"	75	120	138	112 m <sup>3</sup> /h
4"	94	150	158	172 m <sup>3</sup> /h

DN	mbar
1/4"	30-40
3/8"	30-40
1/2"	40-60
3/4"	32-45
1"	35-45
1 1/4"	28-35
1 1/2"	25-35
2"	25-30
2 1/2"	20-25
3"	18-20
4"	18-20

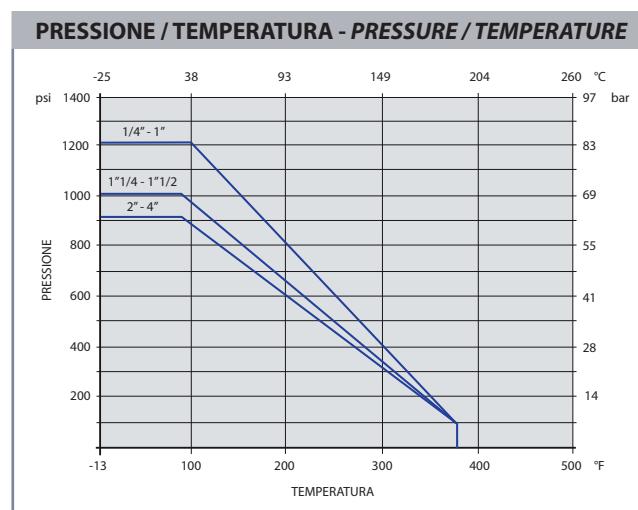

### DIMENSIONI - DIMENSIONS (mm)

### PRESSIONE MINIMA DI APERTURA Min. OPENING PRESSURE OF CHECK VALVE

Tutte le caratteristiche tecniche dei prodotti sono soggette a modifiche senza preavviso - All product's technical specifications are subject to modification without prior notice