








-  Giunto antivibrante filettato - PN16
-  Threaded rubber flexible vibration-free joint - PN16
-  Gummi-Kompensator Gewindeanschlüsse - PN16
-  Manchon double onde taraudé - PN16
-  Резьбовая антивибрационная вставка - PN16




N	DENOMINAZIONE PART NAME	MATERIALE MATERIAL	TRATTAMENTO TREATMENT
1	Corpo - Body	EPDM	Vulcanizzato Vulcanized
2	Raccordo - Union	Acciaio al carbonio Carbon steel	Zincato Zinc plated
3	Dado - Nut	Acciaio al carbonio Carbon steel	Zincato Zinc plated
4	Raccordo - Union	Acciaio al carbonio Carbon steel	Zincato Zinc plated

Size 
3/4" - 3" 16 bar


UNI EN 10226-1

 Max
+100° C
Min
0° C

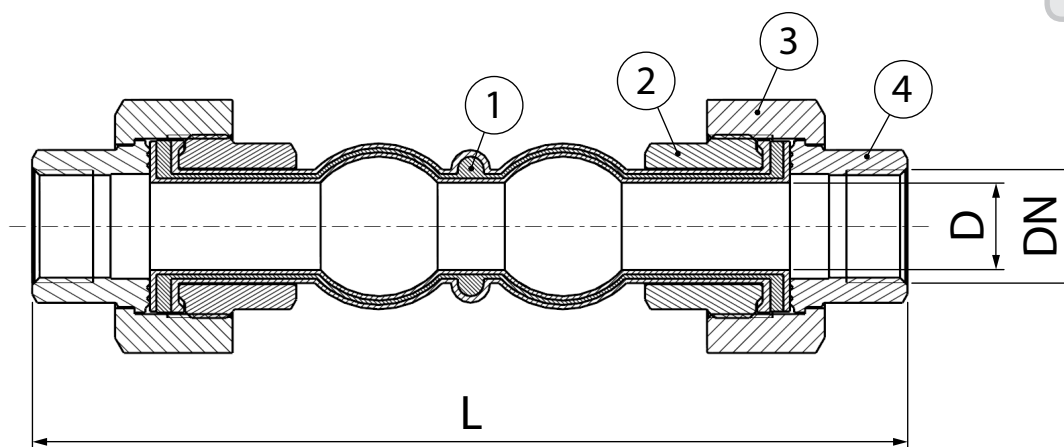

DIMENSIONI - DIMENSIONS (mm)

DN	D	L	C1	C2	A
3/4"	20	203	6	22	32
1"	25	203	6	22	25
1"1/4	32	203	6	22	25
1"1/2	40	203	6	22	20
2"	50	203	6	22	15
2"1/2	65	265	6	22	12
3"	80	285	6	22	10

C1= Estensione assiale - Axial extension
 C2= Compressione assiale - Axial compression
 A= Flessione angolare - Angular movement