

IVR 962

Rubinetto a sfera attacco idrante con portagomma, farfalla rossa

Ball valve with hydrant and pipe connection, red butterfly handle

Wasserkugelhahn mit Schlauch- und Hydrantenanschluss, roter Flügelgriff

Vanne à boisseau sphérique avec fixation pour bouche d'incendie


Кран шаровой садовый со штуцером, красная ручка-бабочка



CARATTERISTICHE / FEATURES

- corpo, sfera, asta e in ottone CW617N.
- sfera lavorata con utensile in diamante, cromata.
- sedi in P.T.F.E. vergine dimensionate con angolo di tenuta di 7° min.
- guarnizione tenuta asta: O-ring in gomma NBR
- leva di comando in alluminio plastificato
- finitura superficiale sabbiata
- filettature ISO 228/1
- PN 25: TEMP. : -20°C ÷ 120°C
- *brass CW617N body, ball, stem*
- *ball ground by diamond-tipped tool, chromium plated*
- *virgin P.T.F.E. seats with 7° min. tightness angle.*
- *O-ring stem packing in NBR rubber.*
- *Aluminium lever with red plastic coating*
- *Yellow finishing.*
- *threading to ISO 228/1.*
- *PN 25: TEMP. : -20°C ÷ 120°C*

DIMENSIONI PRINCIPALI / LEADING DIMENSIONS

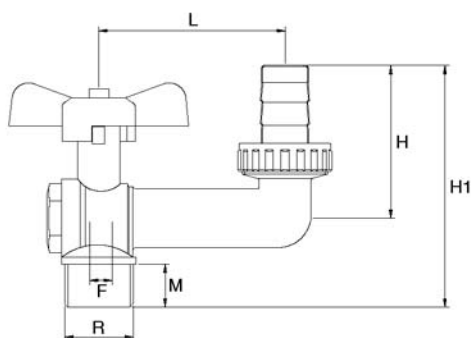

R	1/2"	3/4"
F	10	11
L	56	61
H	45	52
H1	75	85
M	15	16

PRESSIONI DI ESERCIZIO A MAX 80°C / WORKING PREASSURES AT 80°C

PN 40			p.s.i. 600
PN 30			p.s.i. 435
PN 25	*	*	p.s.i. 350
PN 20			p.s.i. 300
	1/2"	3/4"	